




PERCABLES SAC

ELEMENTOS PARA LA ELEVACION, TRACCION
Y AMARRES DE CARGA

Of. Principal: Av. Guillermo Dansey N° 491 - Int. 165-166 - Cercado de Lima
Correo electrónico: ventas@percables.com
Pagina web: www.percables.com

Diametro		TIPO CASCABEL		
		Alma de Acero		
mm	plg.	Peso Kg/mts	Resistencia ruptura en Toneladas	
			IPS	EIPS
6.4	1/4"	0.17	2.67	3.08
8.0	5/16"	0.27	4.16	4.78
9.5	3/8"	0.39	5.95	6.85
11.5	7/16"	0.52	8.07	9.25
13.0	1/2"	0.68	10.40	12.10
14.5	9/16"	0.88	13.20	15.20
16.0	5/8"	1.07	16.20	18.70
19.0	3/4"	1.55	23.20	26.70
22.0	7/8"	2.11	31.40	36.10
26.0	1"	2.75	40.70	46.90
29.0	1-1/8"	3.48	51.30	59.00
32.0	1-1/4"	4.30	63.00	72.50
35.0	1-3/8"	5.21	75.70	87.10
38.0	1-1/2"	6.19	89.70	103.00
42.0	1-5/8"	7.26	104.00	120.00
45.0	1-3/4"	8.44	121.00	139.00
48.0	1-7/8"	9.67	138.00	158.00
52.0	2"	11.00	156.00	180.00
54.0	2-1/8"	12.40	174.00	200.00
57.0	2-1/4"	13.90	195.00	224.00
60.0	2-3/8"	15.50	217.00	249.00
64.0	2-1/2"	17.30	238.00	274.00
67.0	2-5/8"	19.00	261.00	299.00
70.0	2-3/4"	20.80	285.00	333.00
74.0	2-7/8"	22.80	309.00	361.00
77.0	3"	24.70	336.00	389.00
80.0	3-1/8"	26.80	362.00	417.00
83.0	3-1/4"	29.00	389.00	447.00
86.0	3-3/8"	31.30	416.00	487.00
90.0	3-1/2"	33.80	445.00	519.00
92.0	3-5/8"	36.20	458.00	528.00
95.0	3-3/4"	38.70	505.00	585.00
103.0	4"	44.05	569.00	665.00

TIPO CASCABEL

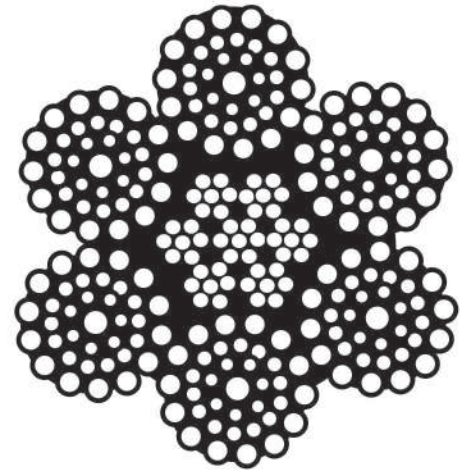

Serie 6 x 37