




PERCABLES SAC

ELEMENTOS PARA LA ELEVACION, TRACCION
Y AMARRES DE CARGA

Of. Principal: Av. Guillermo Dansey N° 491 - Int. 165-166 - Cercado de Lima
Correo electrónico: ventas@percables.com
Pagina web: www.percables.com

TIPO SUPERFLEX

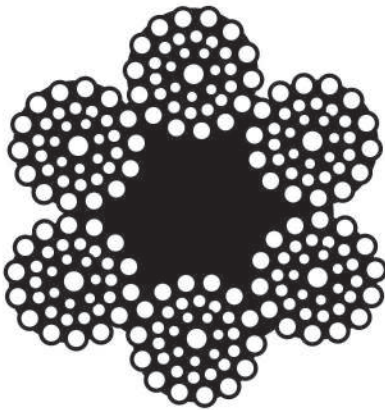

Diametro		TIPO SUPERFLEX	
		Alma de Fibra	
mm	plg.	Peso Kg/mts	Resistencia ruptura en Toneladas
			IPS
6.4	1/4"	0.160	2.49
8.0	5/16"	0.240	3.86
9.5	3/8"	0.350	5.53
11.5	7/16	0.480	7.50
13.0	1/2"	0.630	9.71
14.5	9/16"	0.790	12.20
16.0	5/8"	0.980	15.10
19.0	3/4"	1.410	21.60
22.0	7/8"	1.920	29.20
26.0	1"	2.500	37.90
29.0	1-1/8"	3.170	47.70
32.0	1-1/4"	3.910	58.60
35.0	1-3/8"	4.730	70.50
38.0	1-1/2"	5.630	83.50
42.0	1-5/8"	6.610	97.10
45.0	1-3/4"	7.660	112.00
48.0	1-7/8"	8.800	128.00
52.0	2"	10.000	145.00
54.0	2-1/8"	11.300	162.00
57.0	2-1/4"	12.700	181.00
60.0	2-3/8"	14.100	201.00
64.0	2-1/2"	15.600	221.00
67.0	2-5/8"	17.300	243.00
70.0	2-3/4"	18.900	265.00
74.0	2-7/8"	20.700	287.00
77.0	3"	22.500	312.00
80.0	3-1/8"	24.400	336.00
83.0	3-1/4"	26.300	362.00